


## FOAM-RUBBER SEAL HEAVY LIFTING MADE EASY

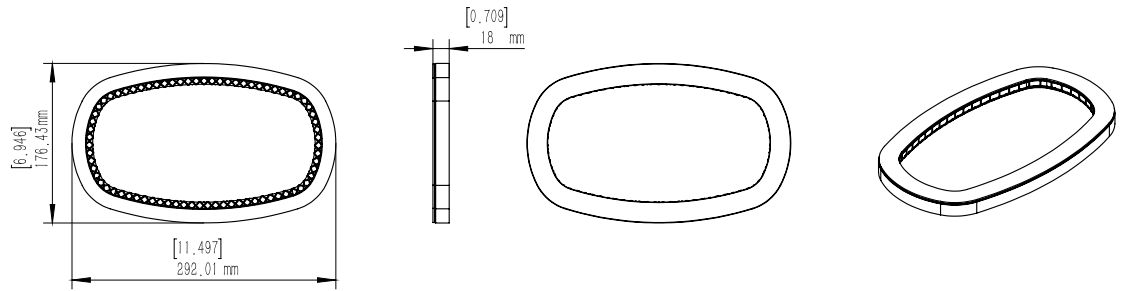

### Specifications:

Black foam seal	
Material	SBR rubber foam sponge
Color	Black
L x W x H	11.5 x 6.9 x 0.7" (293 x 175 x 19 mm)
Density	10.6 Lb/cft (170 kg/m <sup>3</sup> )
Hardness, Shore C	~10 +/-2
Tearing Pressure	1800 Psi (126 kg/cm <sup>2</sup> )
Compression to 25% size at	8.5 Psi (6000 kg/m <sup>2</sup> )
Water Absorption, %	<=5
Shrinkage at 160F (70C) for 24 hrs, %	<=20
Recommended Storage Temperature	Room temperature
Red seal	
Material	Silicon Foam
Color	Red
Density	40.5 Lb/cft (650 kg/m <sup>3</sup> )
Hardness, Shore C	55 +/-5
Water Absorption, %	<=4
Recommended Storage Temperature	Room temperature

### Lifting Capacity:

Material	Glass	Ceramic Tiles	Metal	Plastic	Wood	Rough Slate	Rough Concrete	Dry Wall
Direction								
Perpendicular Hold	375Lbs (170 kg)	375Lbs (170 kg)	242Lbs (110 kg)	220Lbs (100 kg)	220Lbs (100 kg)	176Lbs (80 kg)	176Lbs (80 kg)	165Lbs (75 kg)
Parallel Hold	265Lbs (120 kg)	265Lbs (120 kg)	242Lbs (110 kg)	220Lbs (100 kg)	143Lbs (65 kg)	176Lbs (80 kg)	176Lbs (80 kg)	143Lbs (65 kg)

#### GRABO headquarters:

Eastern Commerce Center  
6000 S Eastern Ave  
Unit 9E  
Las Vegas, Nevada, 89119

Info@GRABO.com

www.GRABO.com

#### Main Office:

+1 (844) 430-0510

#### Help & Warranty:

+1 (702) 718-2433